
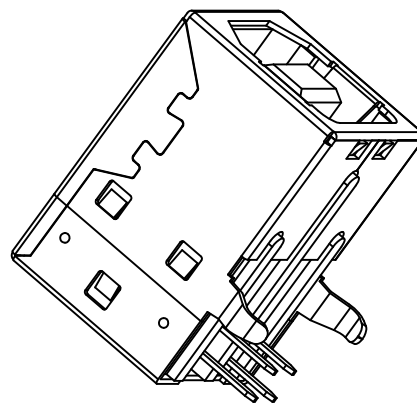
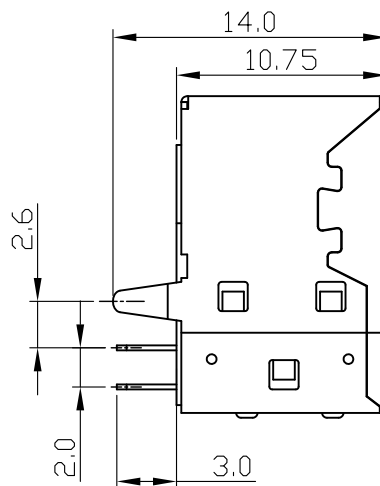
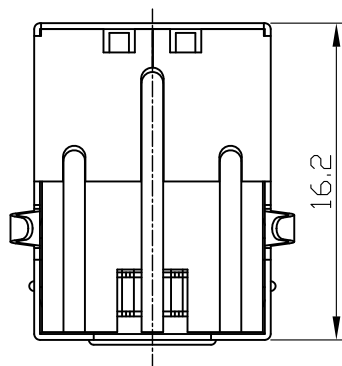


正式

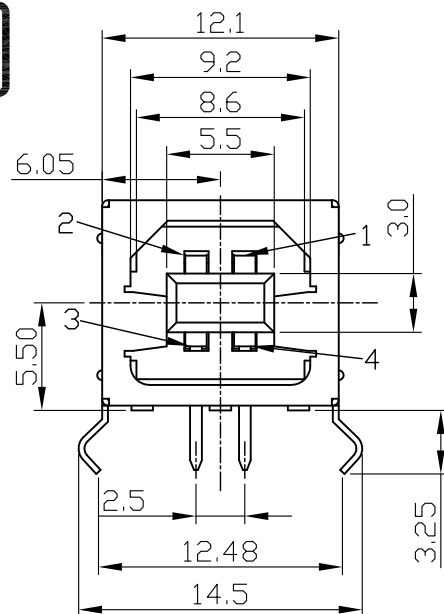

RoHS
Compliant

變更記號	變更日期	ECN NO.	REV.	說	明	擔當者
△						


ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.5Amperes.
Dielectric Withstanding Voltage: AC 500V at sea level.
Insulation Resistance: 1000Megohms Min.
Contact Resistance: 30Milliohms Max.
Operating Temperature: -30°C to +70°C

MECHANICAL CHARACTERISTICS

Mating Force: 3.5Kg. Maximum.
Unmating Force: 0.7Kg. Minimum.

Rating : DC 0.3A 30V

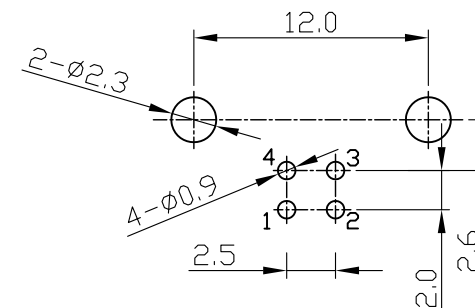

PCB LAYOUT (PCB THICKNESS: 1.60/1.20MM)
 OTHER TOLERANCE: ±0.05

UNLESS OTHERWISE
SPECIFIED TOLERANCES



KAI YUI TECHNOLOGIC CORP.

NO	PART NAME	Q' TY	MATERIAL	PLATING & COLOR
4	CONTACTS	5	COPPER ALLOY	GOLD 1-3μ" AT CONTACT AREA LEAD FREE TIN ALLOY AT TERMINATION, NICKEL OVER ALL.
3	SHELL	1	SPCC	Ni
2	SHELL COVER	1	SPCC	Ni
1	HOUSING	1	PBT	WHITE

DECIMALS :
 X : ± 0.50
 X.X : ± 0.30
 X.XX : ± 0.15

ANGLES :
 X° ± 5°
 X.X° ± 3°

PART NAME	USB-B TYPE Female			DRAWN DATE	2009. 12. 25
MATERIAL	-----	PART NO :	KDU06		
THICKNESS	-----	SCALE :	4 : 1	SIZE :	A4
PLATED COLOR	-----	REV :	A	SHEET :	1 of 1
				CHECKED	JACKY
				DRAWN	ROY